


Features

Package Dimension

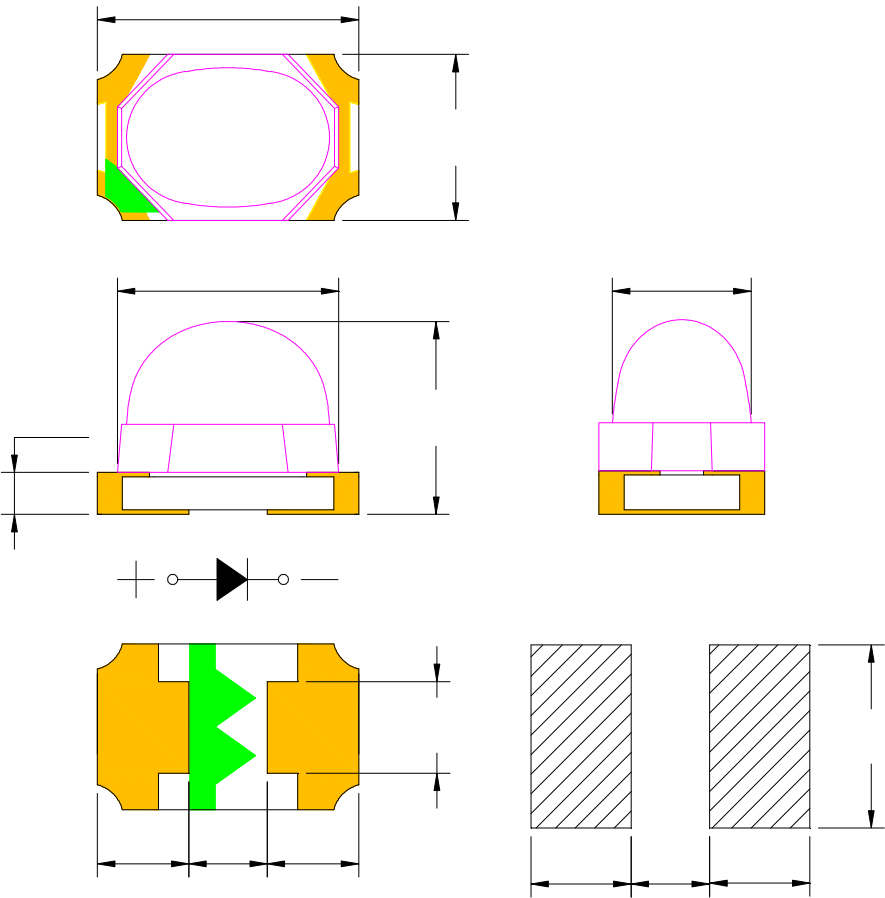

Notes:

Absolute Maximum Ratings at Ta=25

1. Storage and operating:

2. Peak Forward Current:

Condition for is IFP pulse: Pulse Width $\leq$ 100 μ s and duty $\leq$ 1%.

3. Caution in ESD:

LIGHT

LIGHT ELECTRONICS CO., LTD.


Part No. SL-T302012

L

LIGHT ELECTRONICS CO., LTD.



Note:

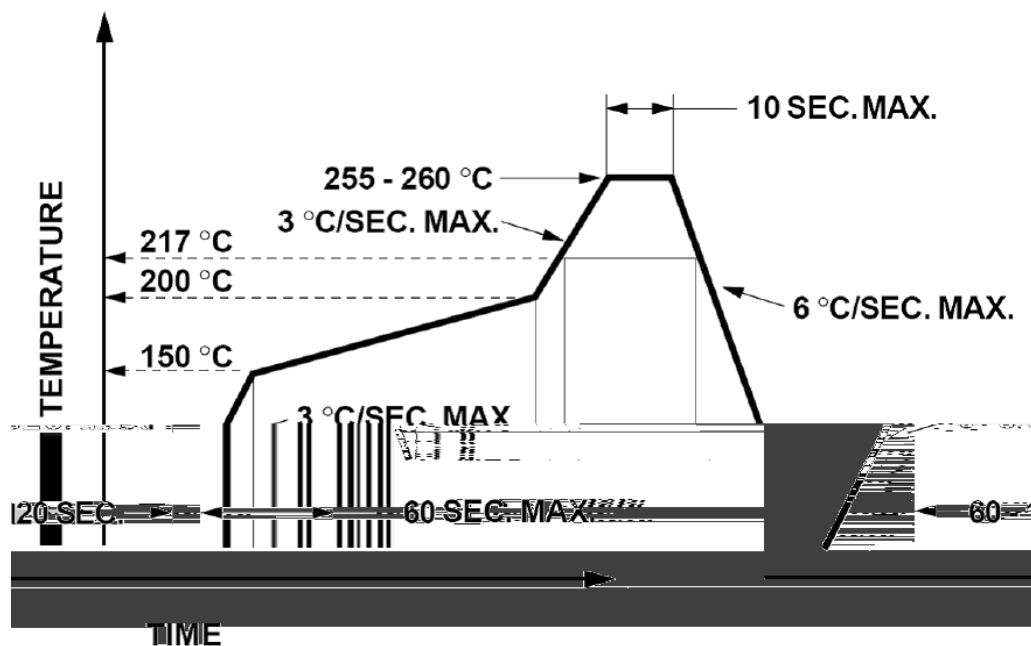

°C

