

LG-T1921RGBA-TD-AL



LG-T1921RGBA-TD-AL




TOP Full-color LED

Catalogue

Electrical Characteristics.....3

Typical Characterist.ter.4 TD[10.5 0 0 10.5 02.73 22.01()TJ TD[...6(....)B(....)6(....)6(....)60.5(T)2.017 6(....)6(....)6(....)6(....)

Typical Characteristics Curves

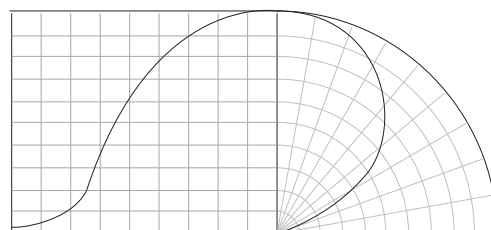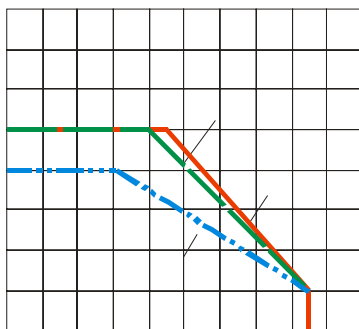

Reliability Test Items And Conditions

实验项目	参考标准	实验条件	时间	样品数	判据
		←→			


Criteria For Judging Damage

测试项目	符号	测试条件	判定标准
			μ
			$\geq$ $\leq$

Product design and operational recommendation


1 mm

Product design Unit: mm

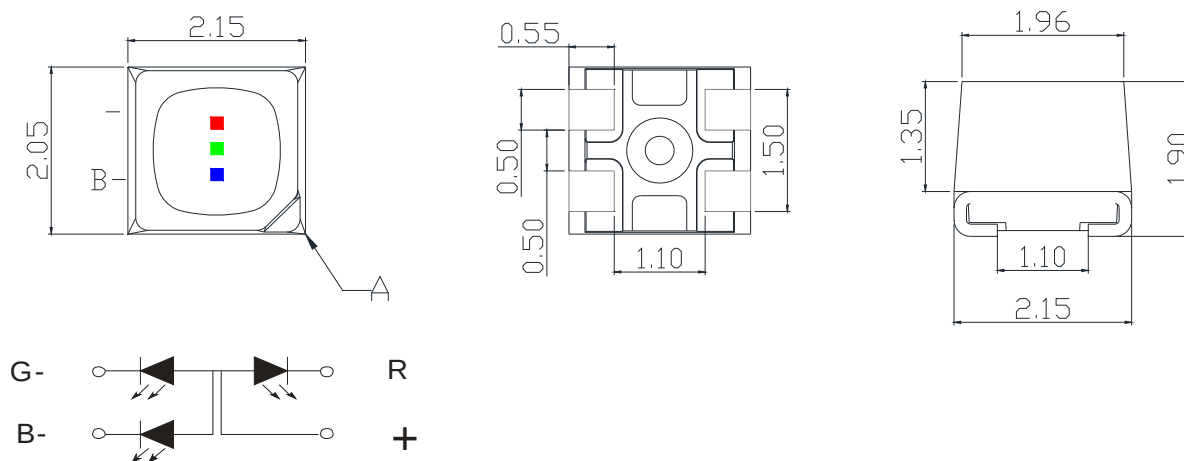


2 mm

Recommended soldering pad (Unit: mm)

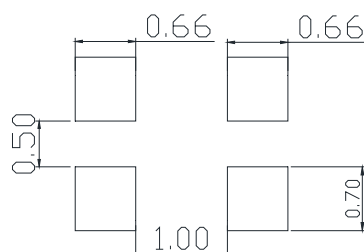

3 0.75mm


Recommendation for glue filling: filling height must be higher than or equal to 0.75mm

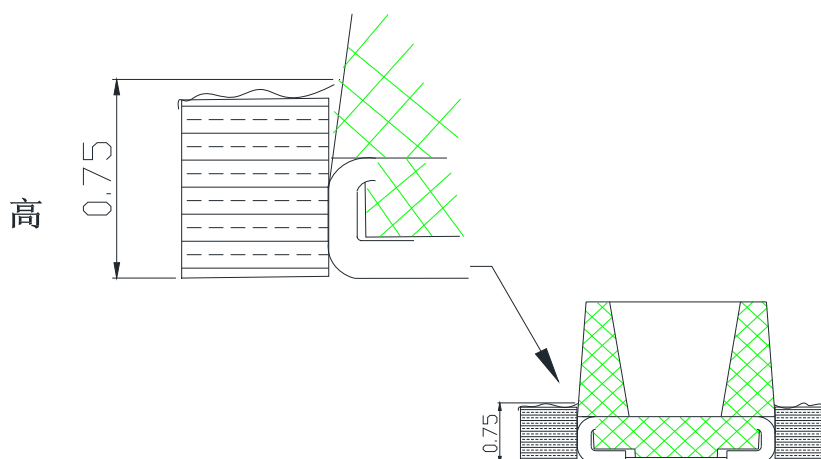



1

Packaging (1)

✧ Carrier Tape

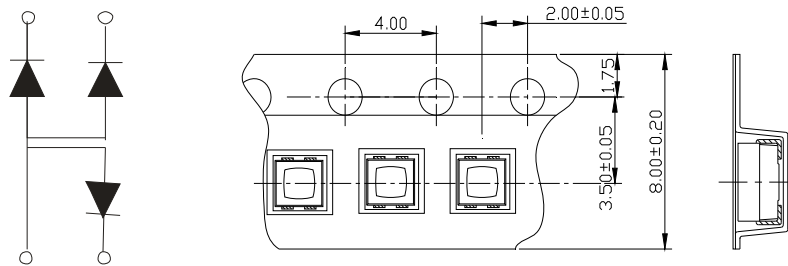

✧ Details Of Carrier Tape



✧ Reel Dimension




2

Guideline for Soldering (2)

LIGHT

LIGHT ELECTRONICS CO., LTD.

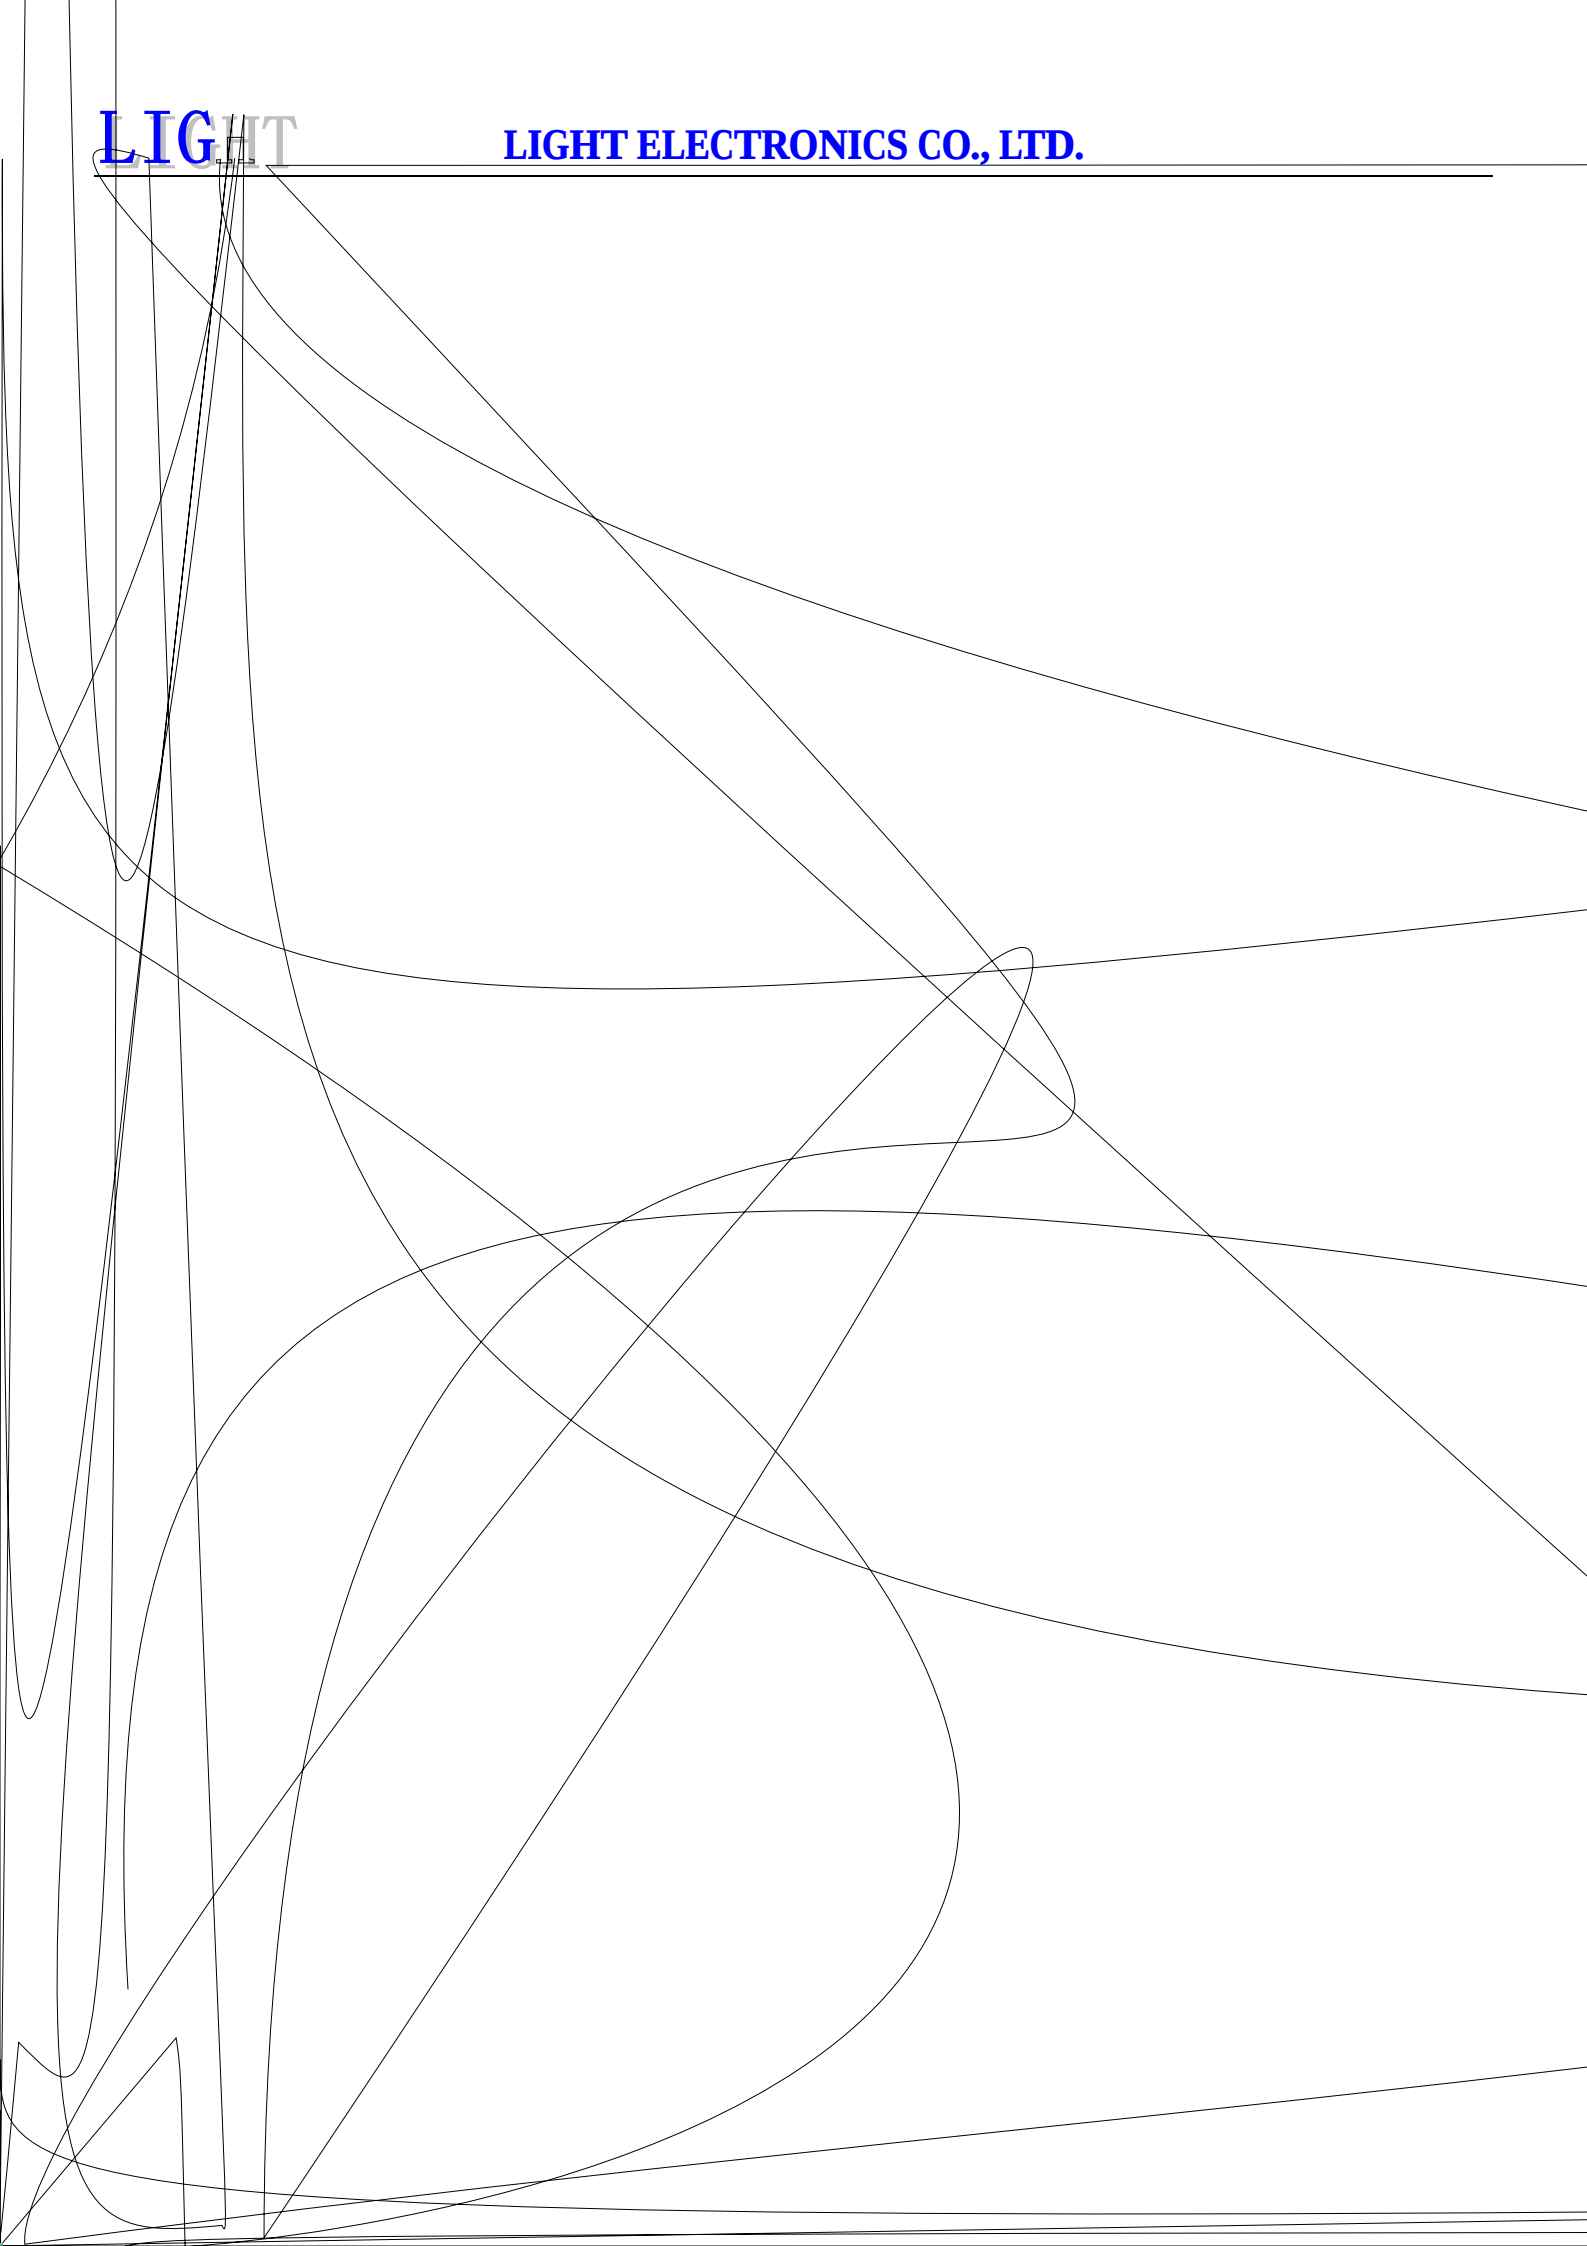

(2)



Precautions (2)

3.

Design Consideration

•

•

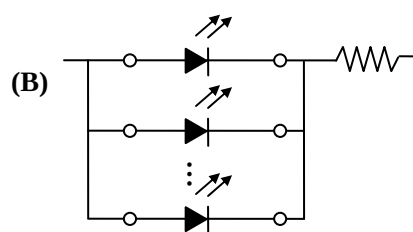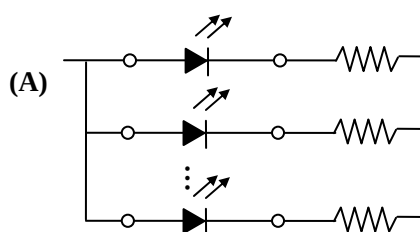

•

4.

Reverse voltage protection

•

