



Features

Package Dimension



Notes:

Absolute Maximum Ratings at Ta=25


Parameter	MAX.	Unit

1. Storage and operating:

2. Peak Forward Current:


Condition for is IFP pulse: Pulse Width 100 μ s and duty 1%.


3. Caution in ESD:

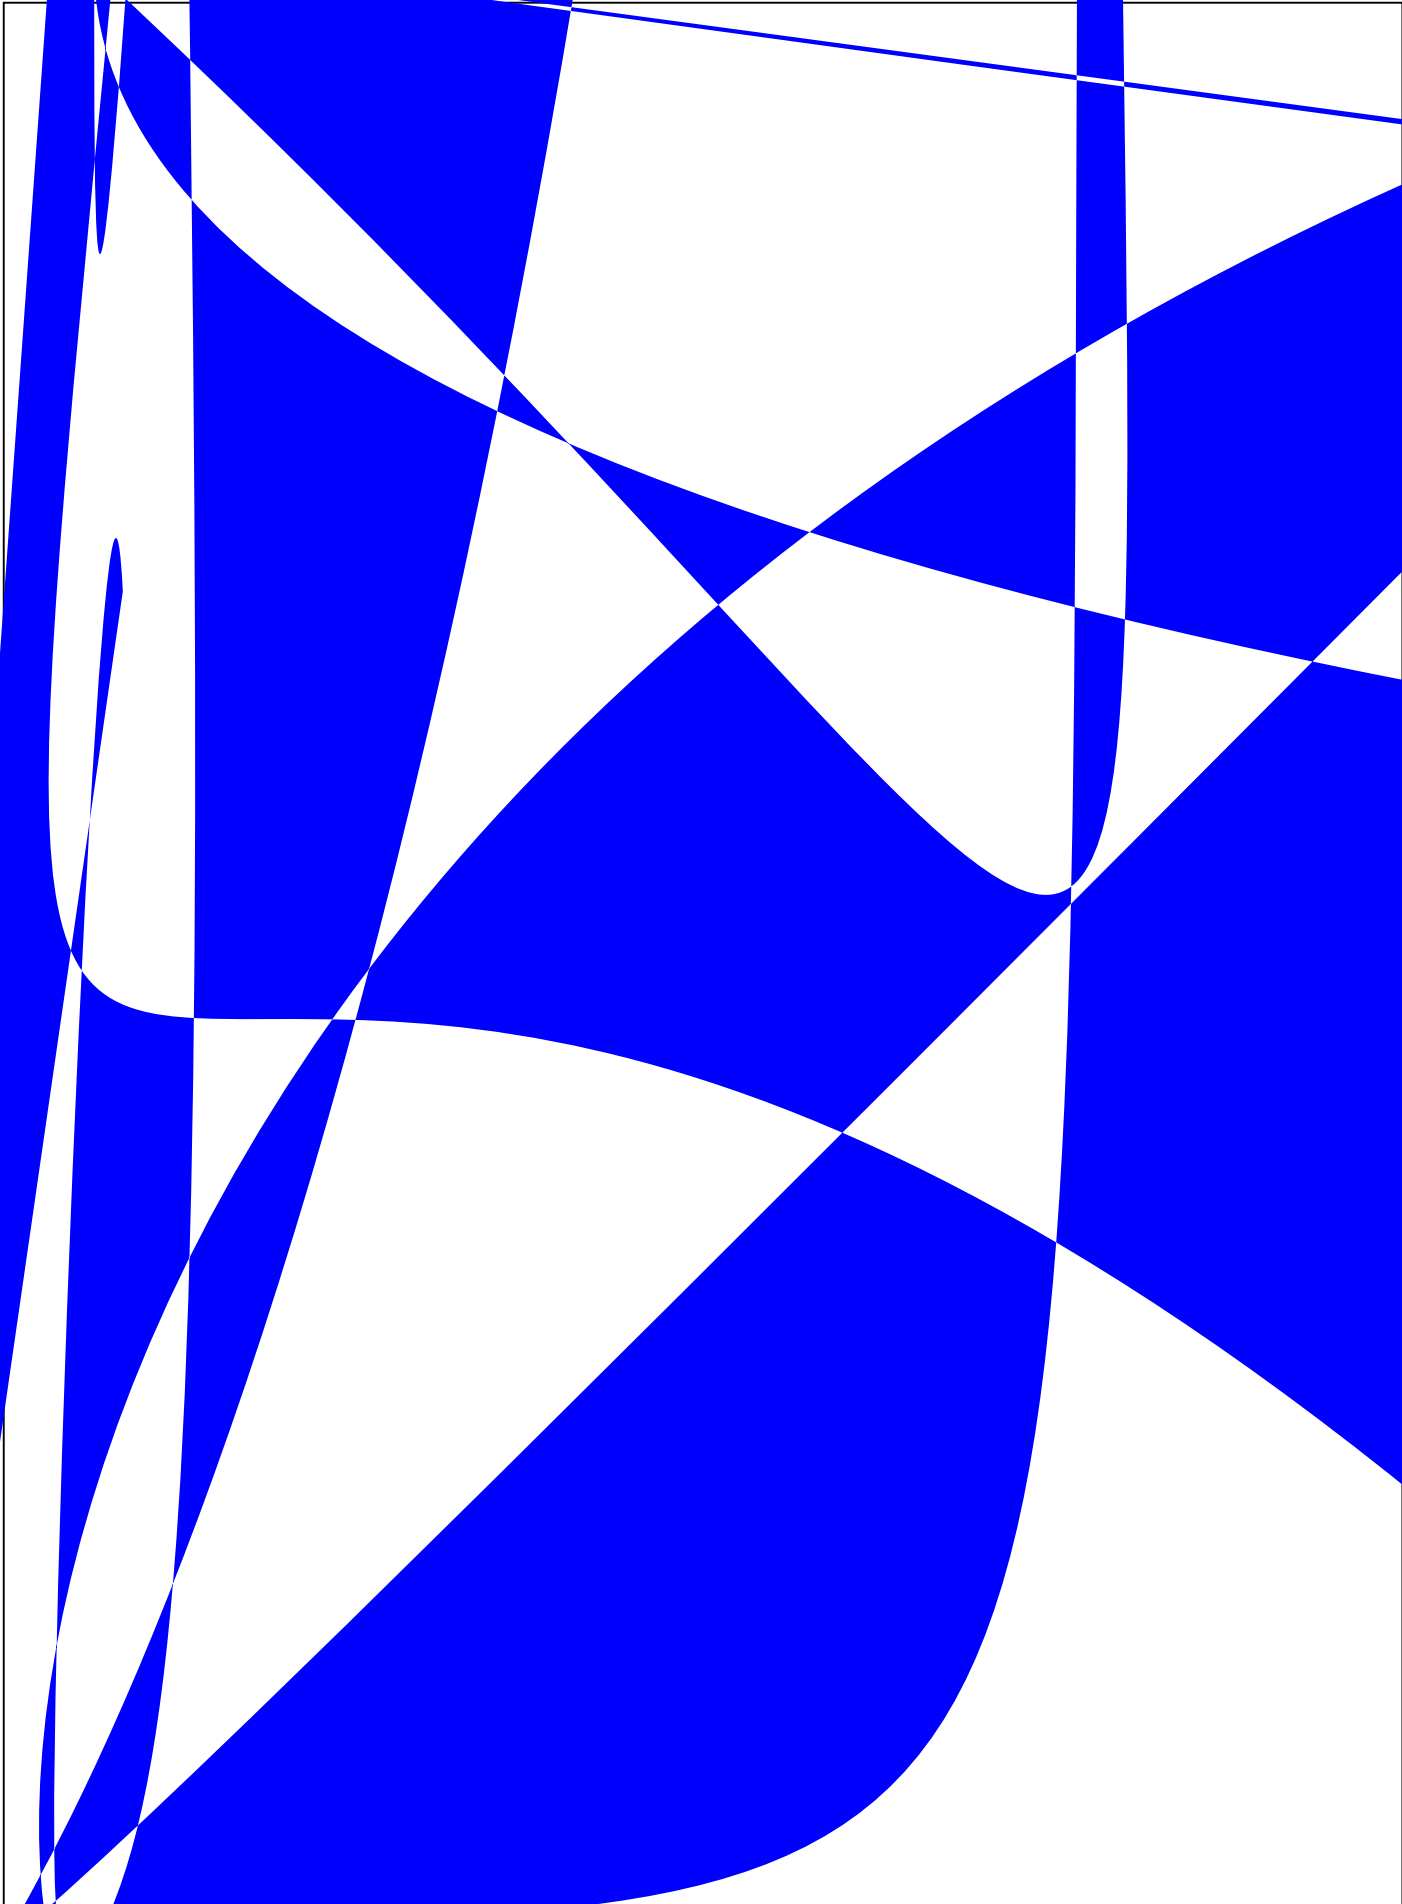

	22	26
	26	31.9
	31.9	37
	37	44
	44	53

NOTE

LIGHT 



LIGHT 