

LG-03IR4C94C-302BA-B1

DATA SHEET

SPEC. NO. : SZ20071701
DATE : 2020/07/17
REV. : A/0

Approved By:

Checked By:

Prepared By:

LIGHT

LED MOUNTING METHOD

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead-forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures (Fig.1).

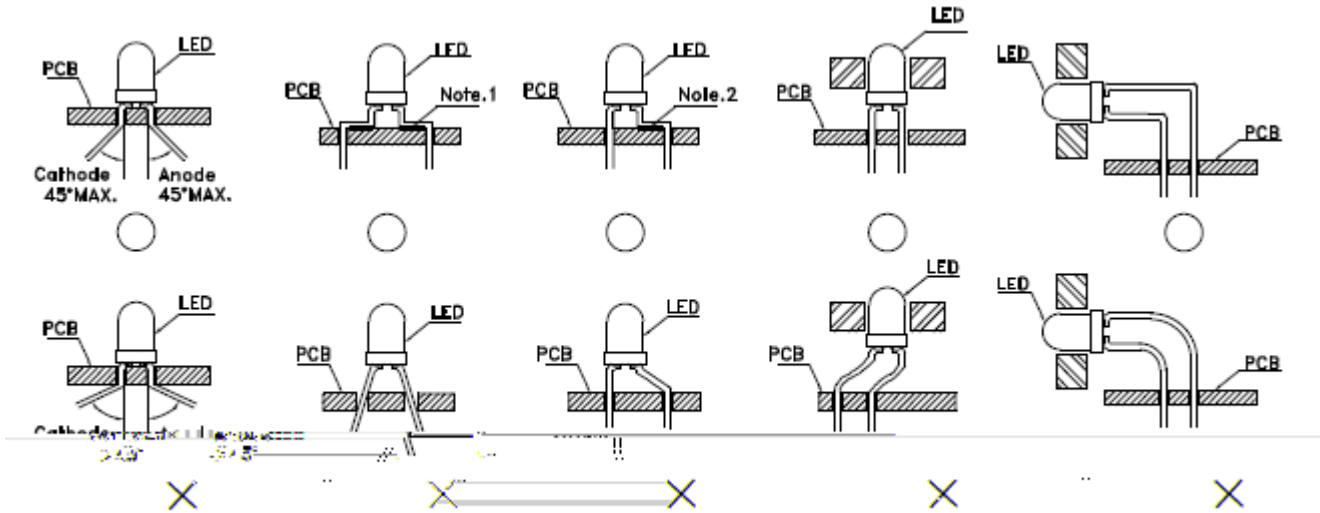


Fig. 1

Note 1-2: Do not route PCB trace in the contact area between the lead frame and the PCB to prevent short-circuits.

2. When soldering wire to the LED, use individual heat-shrink tubing to insulate the exposed leads to prevent accidental contact short-circuit (Fig.2).


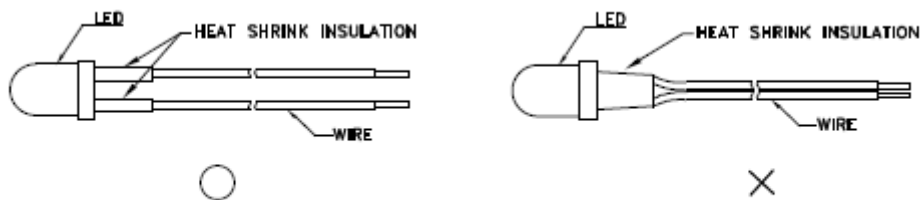


Fig. 2

3. Use stand-offs (Fig.3) or spacers (Fig.4) to securely position the LED above the PCB.






LIGH

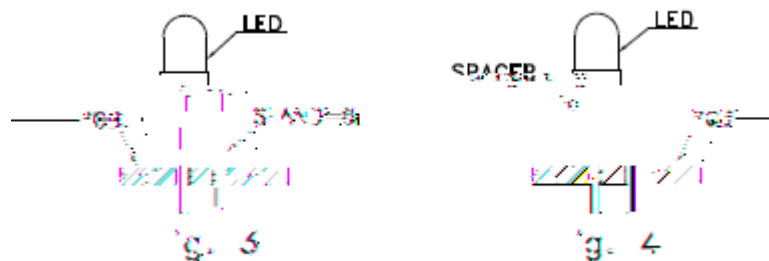

Part No.	LG-03IR4C94C-302BA-B1	Page	7 of 9
-----------------	------------------------------	-------------	---------------

PACKAGE

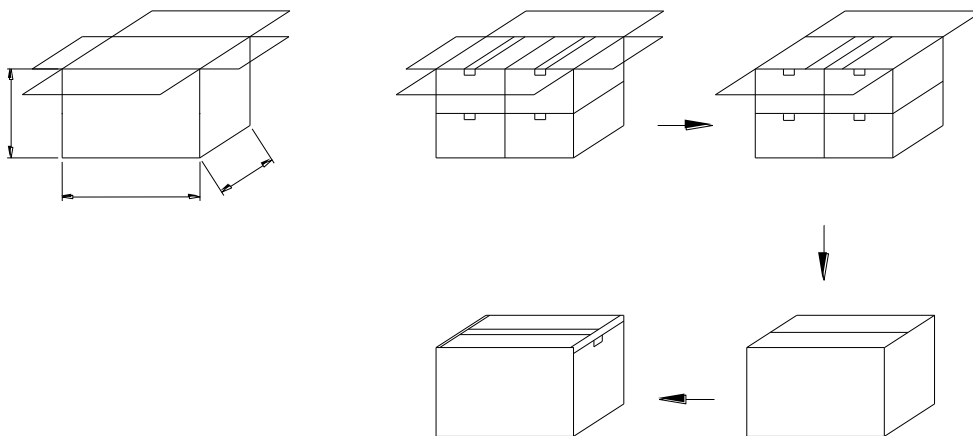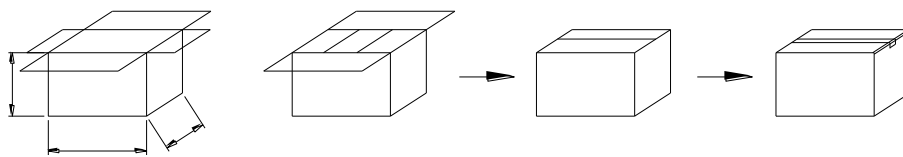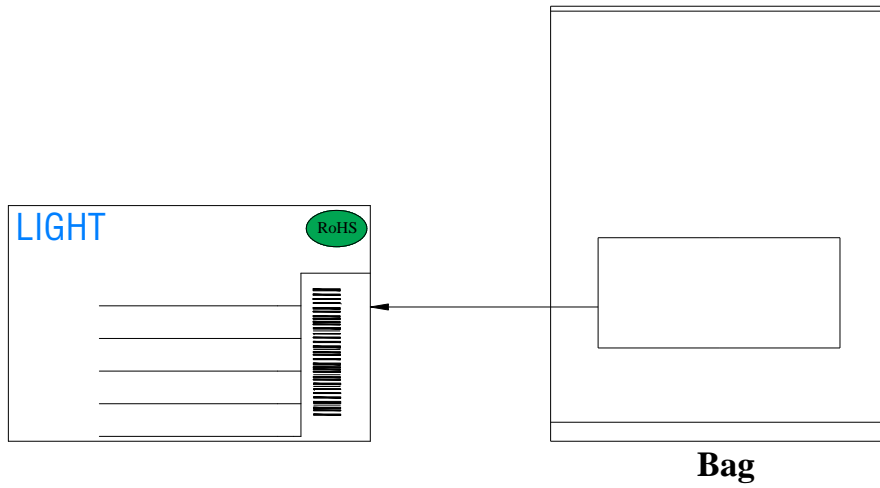

Bag minimum volume (pcs / Bag)	Bag volume (pcs / Bag)	Inner box volume (Bag / box)	Outer carton volume (Box / Carton)
250	1000	10	4

