

# **LG-T1921RGBA-TD-AL**

## **DATA SHEET**

SPEC. NO. : SZ22101501  
DATE : 2022/10/15  
REV. : A/0

Approved By:

Checked By:

Prepared By:



**LG-T1921RGBA-TD-AL**

**TOP Full-color LED**

---






**Catalogue**

Electrical Characteristics.....3

Typical Characteri0.449teri5i0.449tert.(i5i0tÈ 4(y8 C130tÈ 3(y8 4i5i0tÈ 4(y8 s5(acCi5iut



## Typical Characteristics Curves

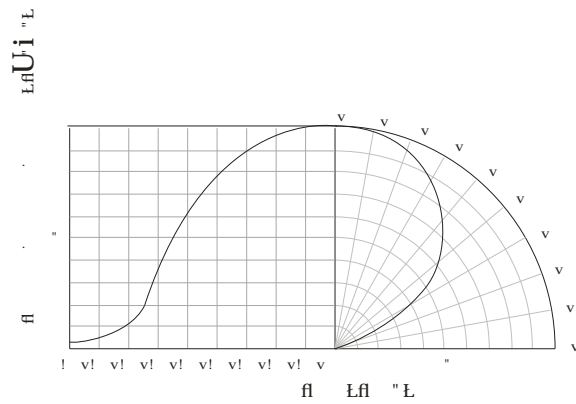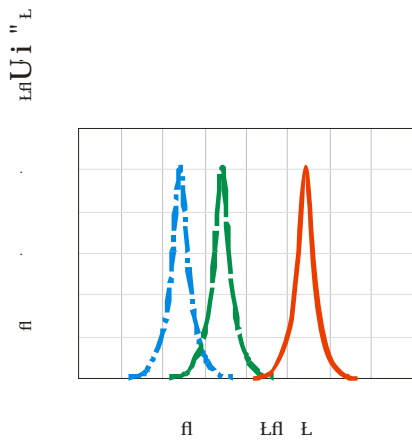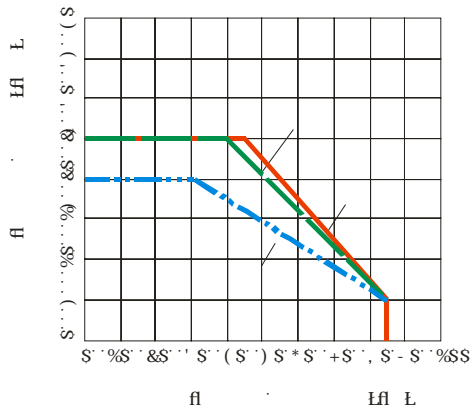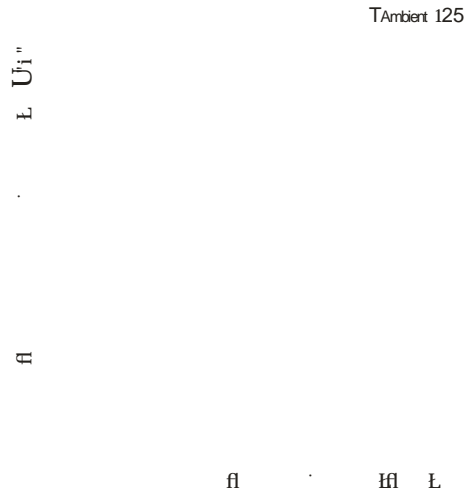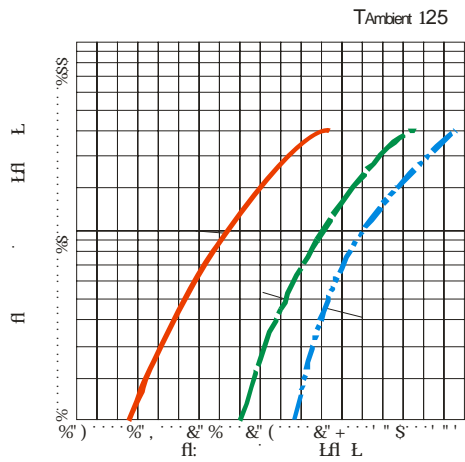

### Reliability Test Items And Conditions

实验项目	参考标准	实验条件	时间	样品数	判据
		↔			


### Criteria For Judging Damage

测试项目	符号	测试条件	判定标准
			μ
			≧ ≦

## Product design and operational recommendation


1 mm

Product design Unit: mm

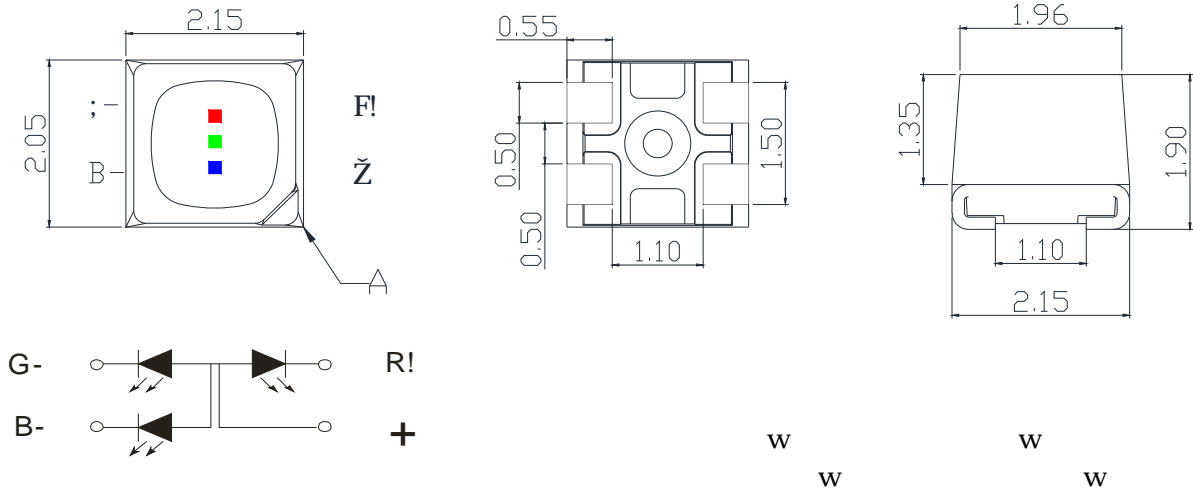


2 mm

Recommended soldering pad (Unit: mm)

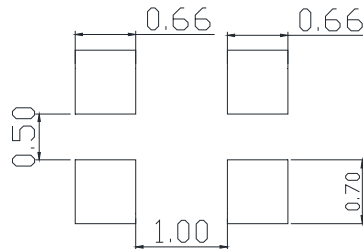

3 0.75mm


Recommendation for glue filling: filling height must be higher than or equal to 0.75mm

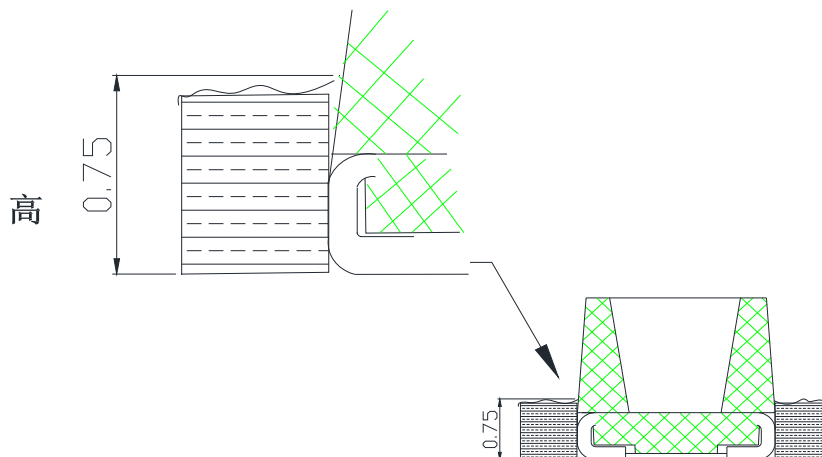


## 1

### Packaging (1)

#### Carrier Tape

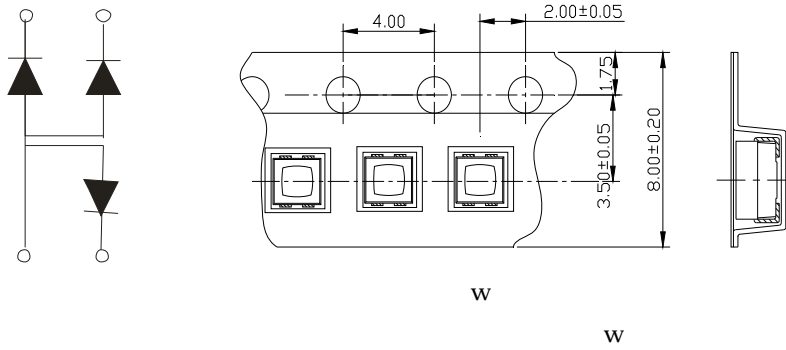

#### Details Of Carrier Tape

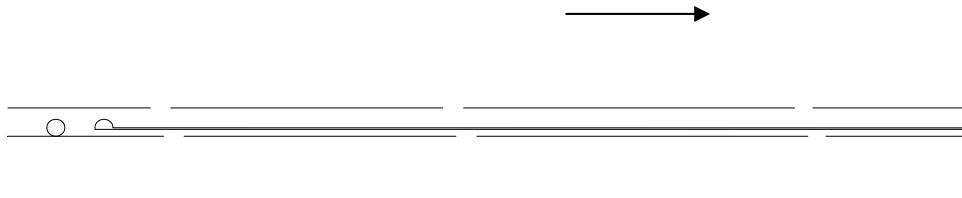

#### Reel Dimension




LIGHT

**LIGHT ELECTRONICS CO., LTD.**

---

LIGHT

LIGHT ELECTRONICS CO., LTD.

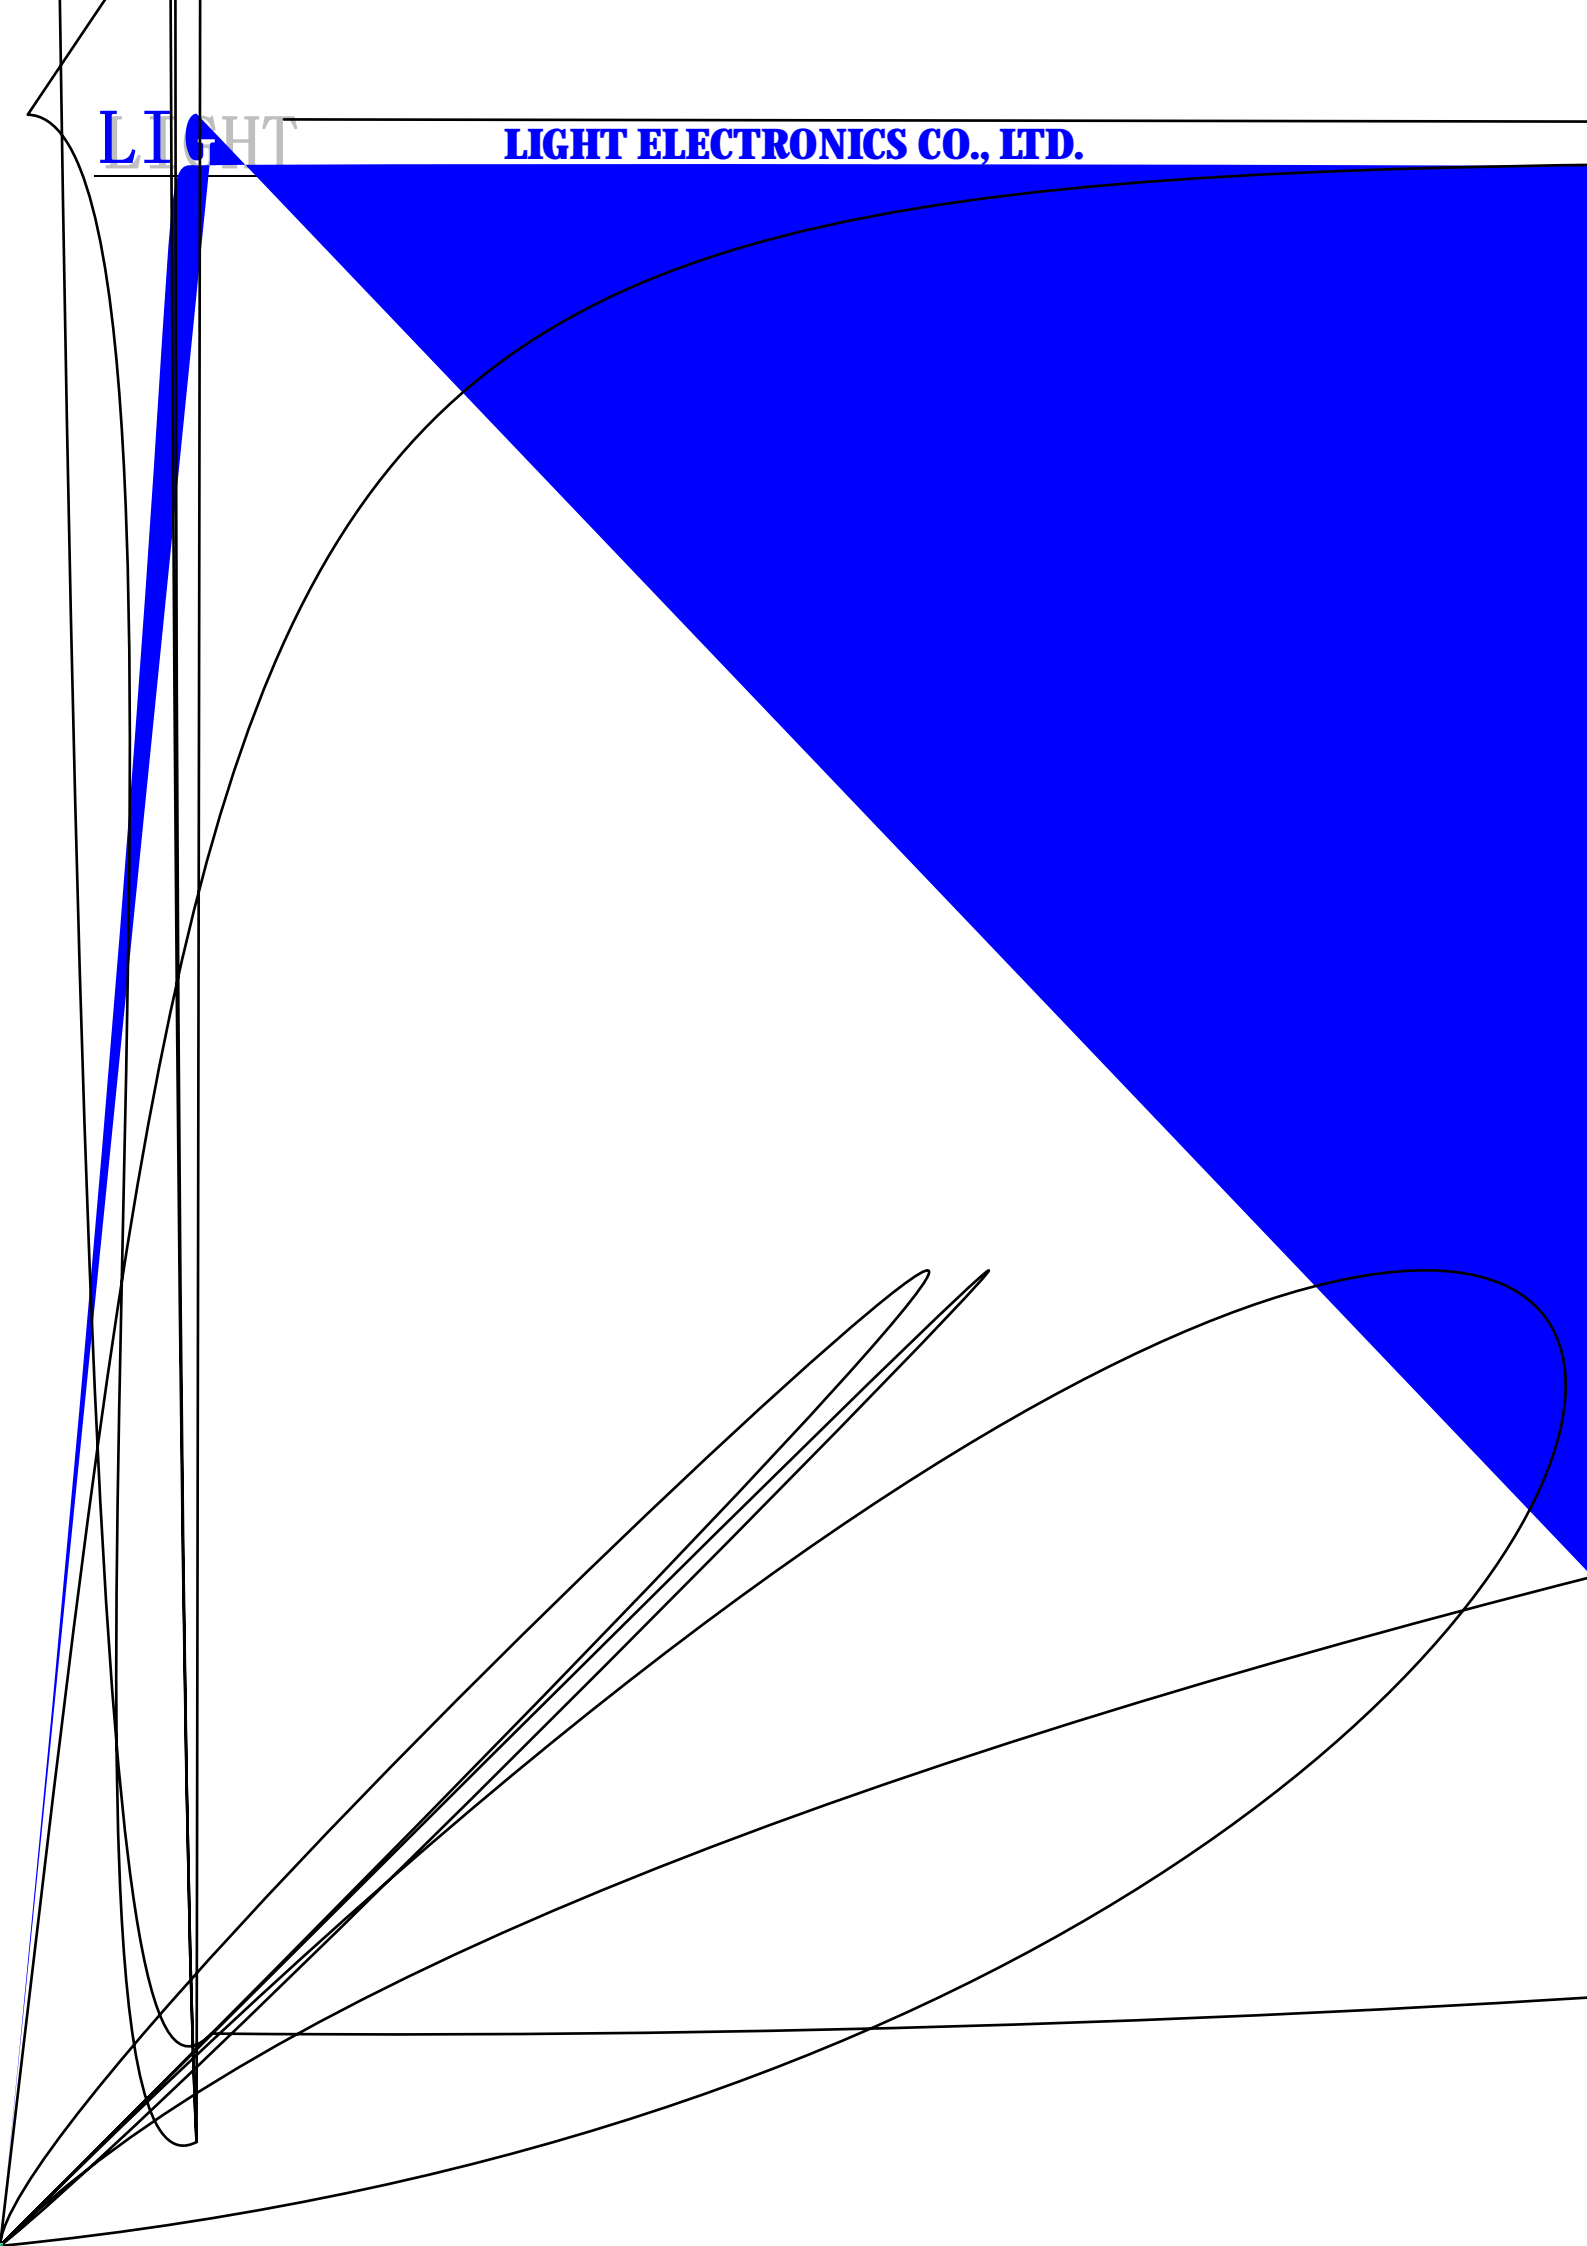



## 2

### Guideline for Soldering (2)


- x .
- x .
- x .
- x .

~~LED~~ LED6ED

LED

**LIGHT**

**LIGHT ELECTRONICS CO., LTD.**

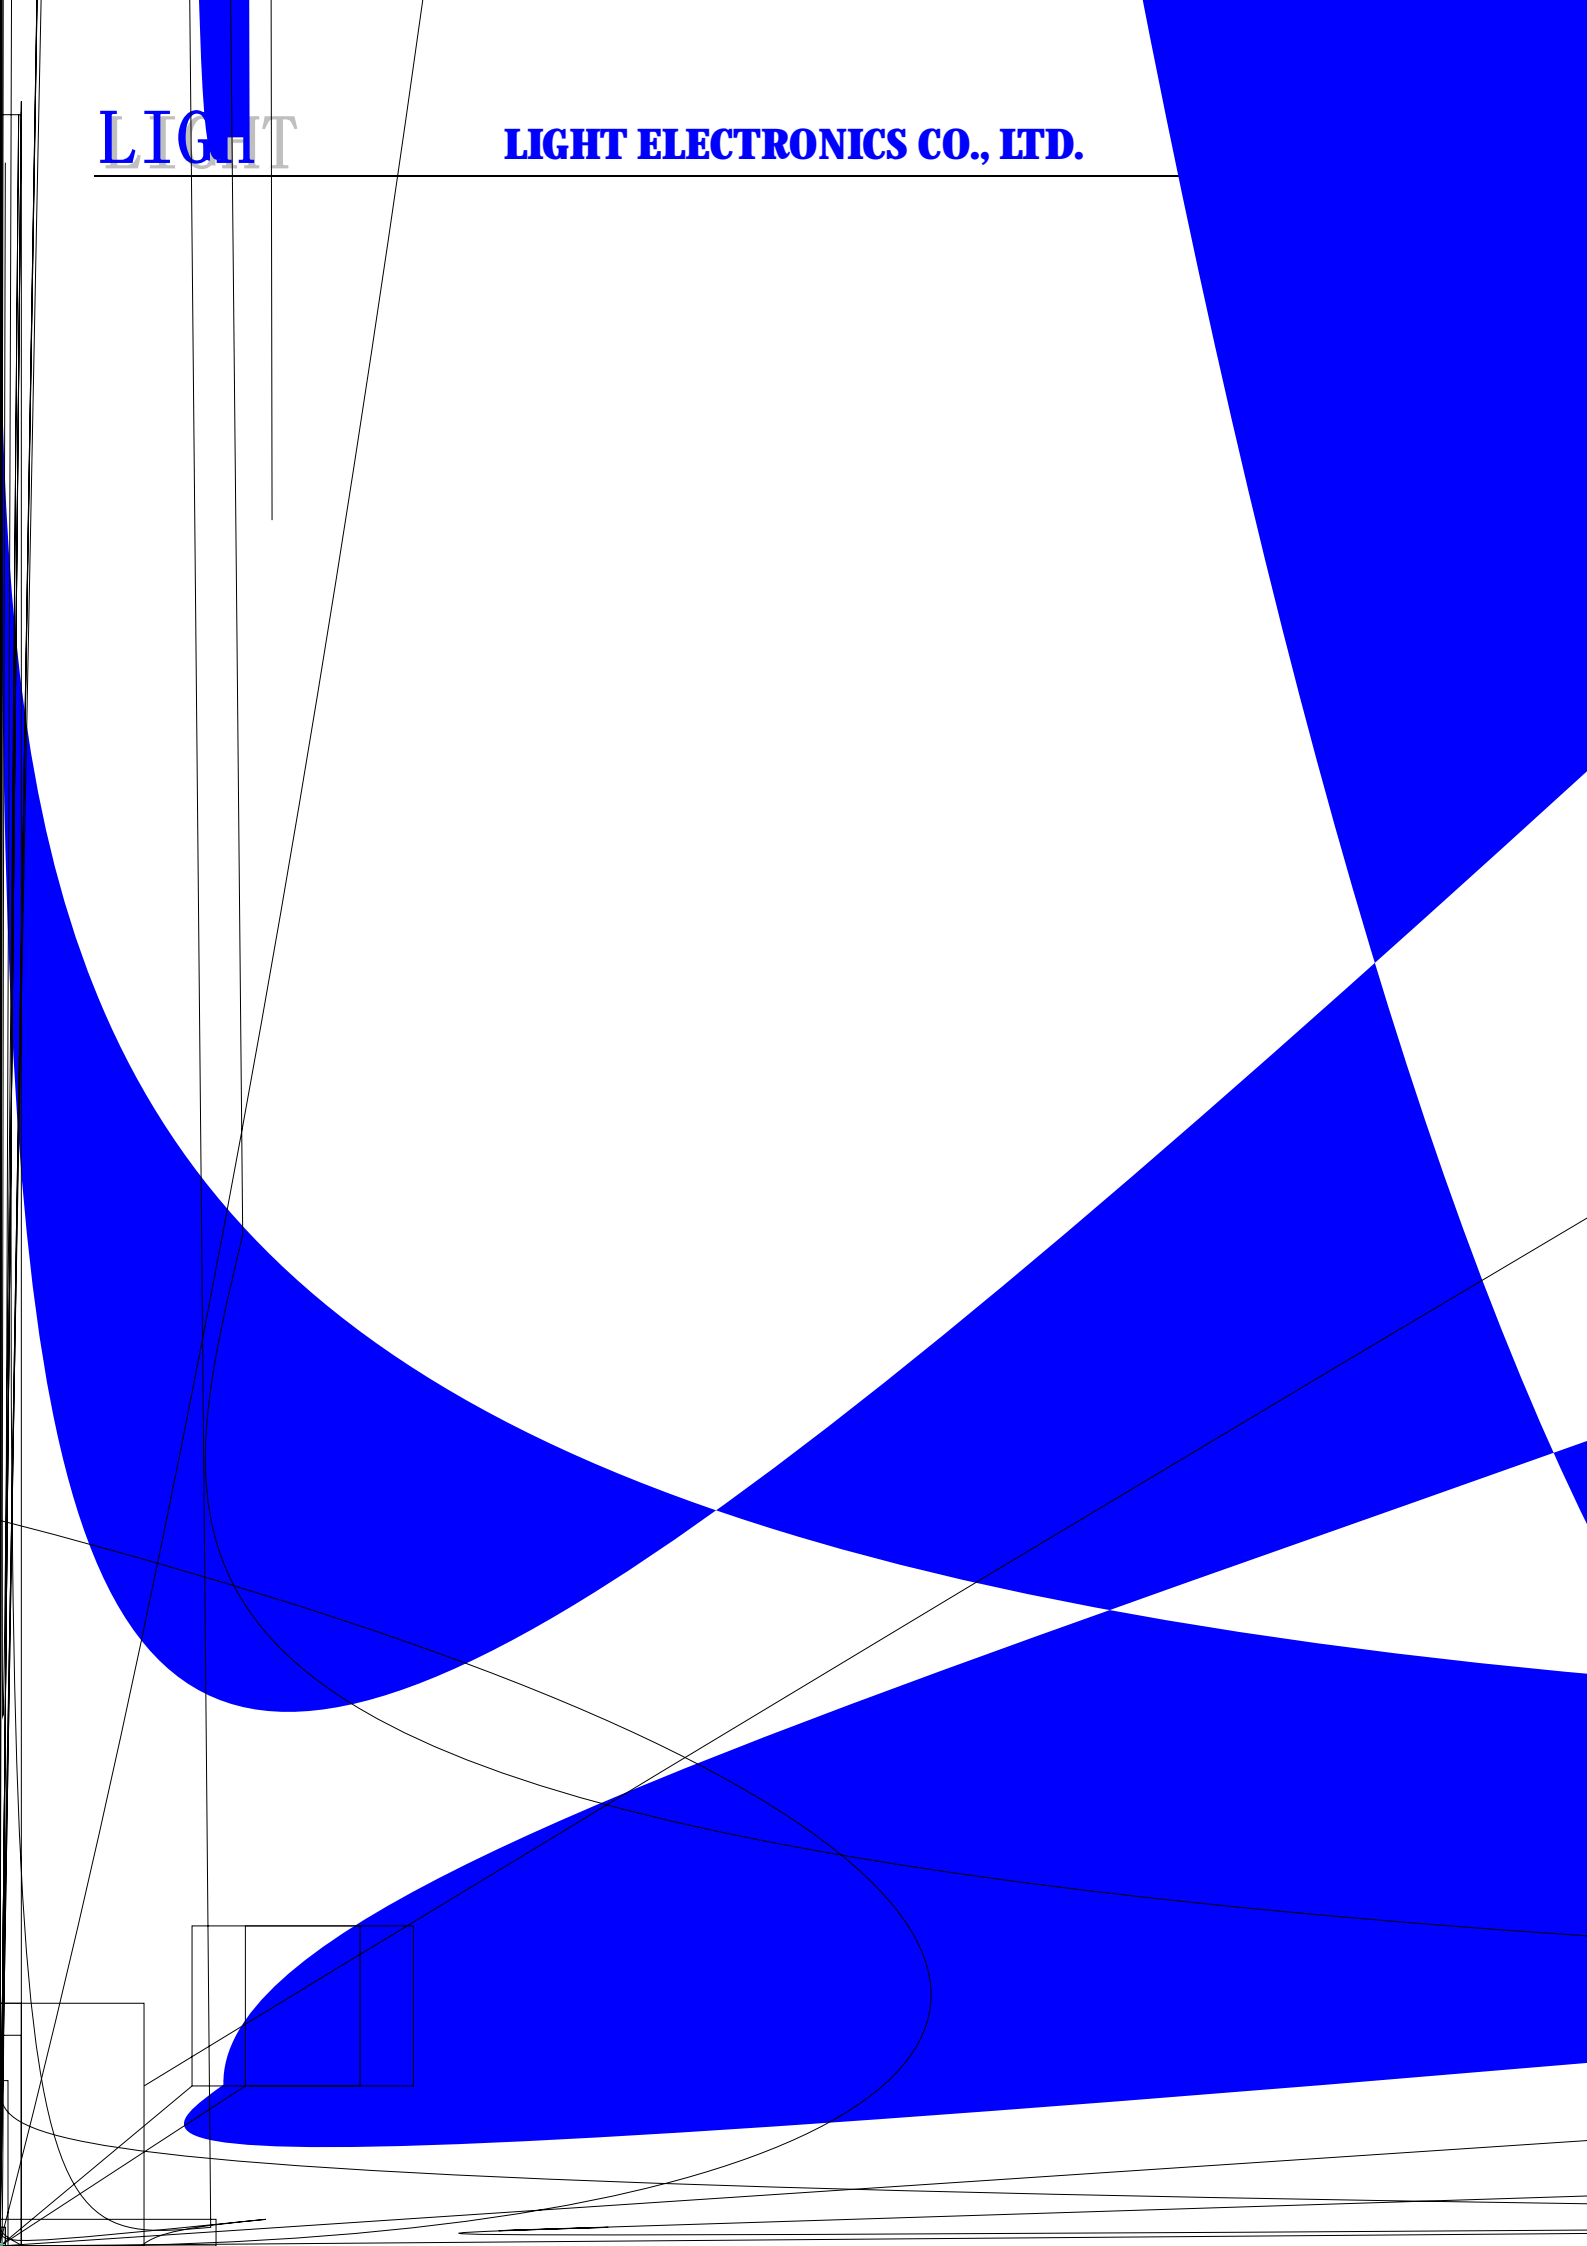

## (2)



### Precautions (2)

3.

#### Design Consideration

- 

- 

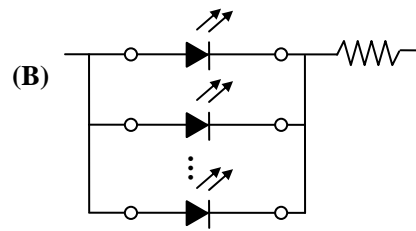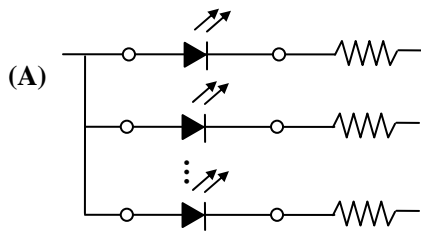

- 

4.

#### Reverse voltage protection

-

