




LIG

LIGHT ELECTRONICS CO., LTD.




--	--	--	--

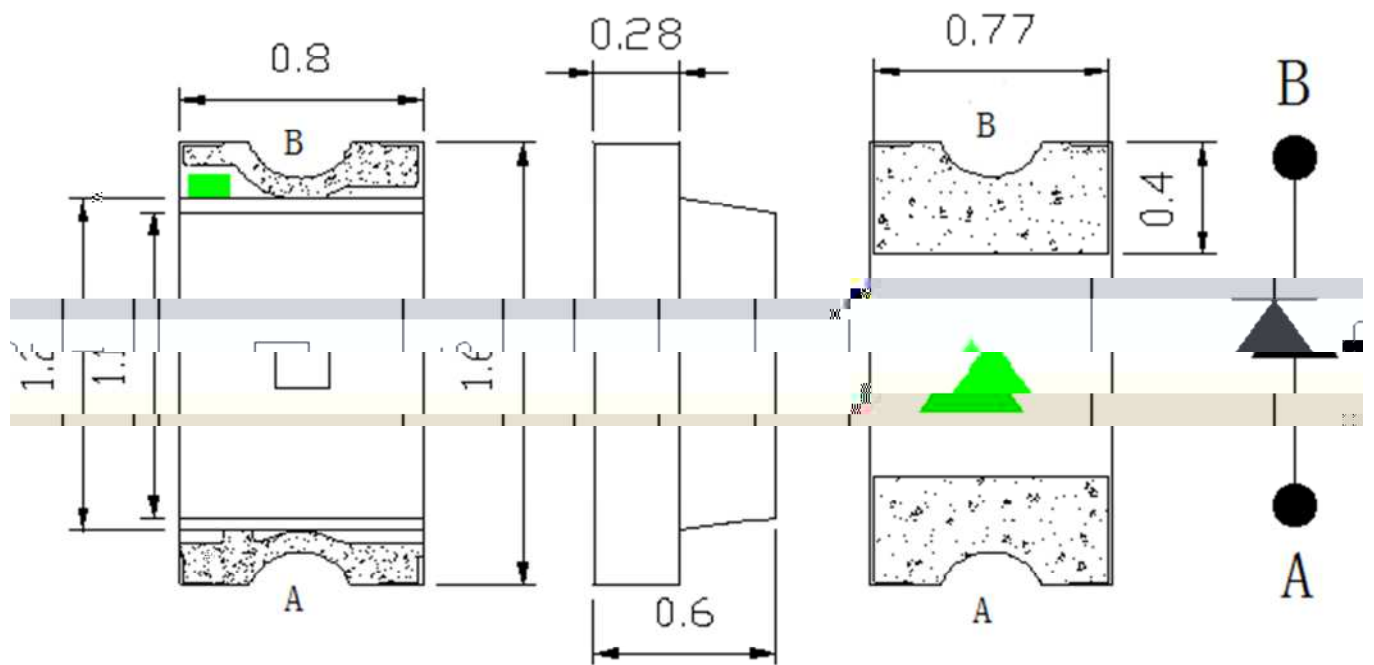


ALPHAT


ELECTRONICS CO., LTD.

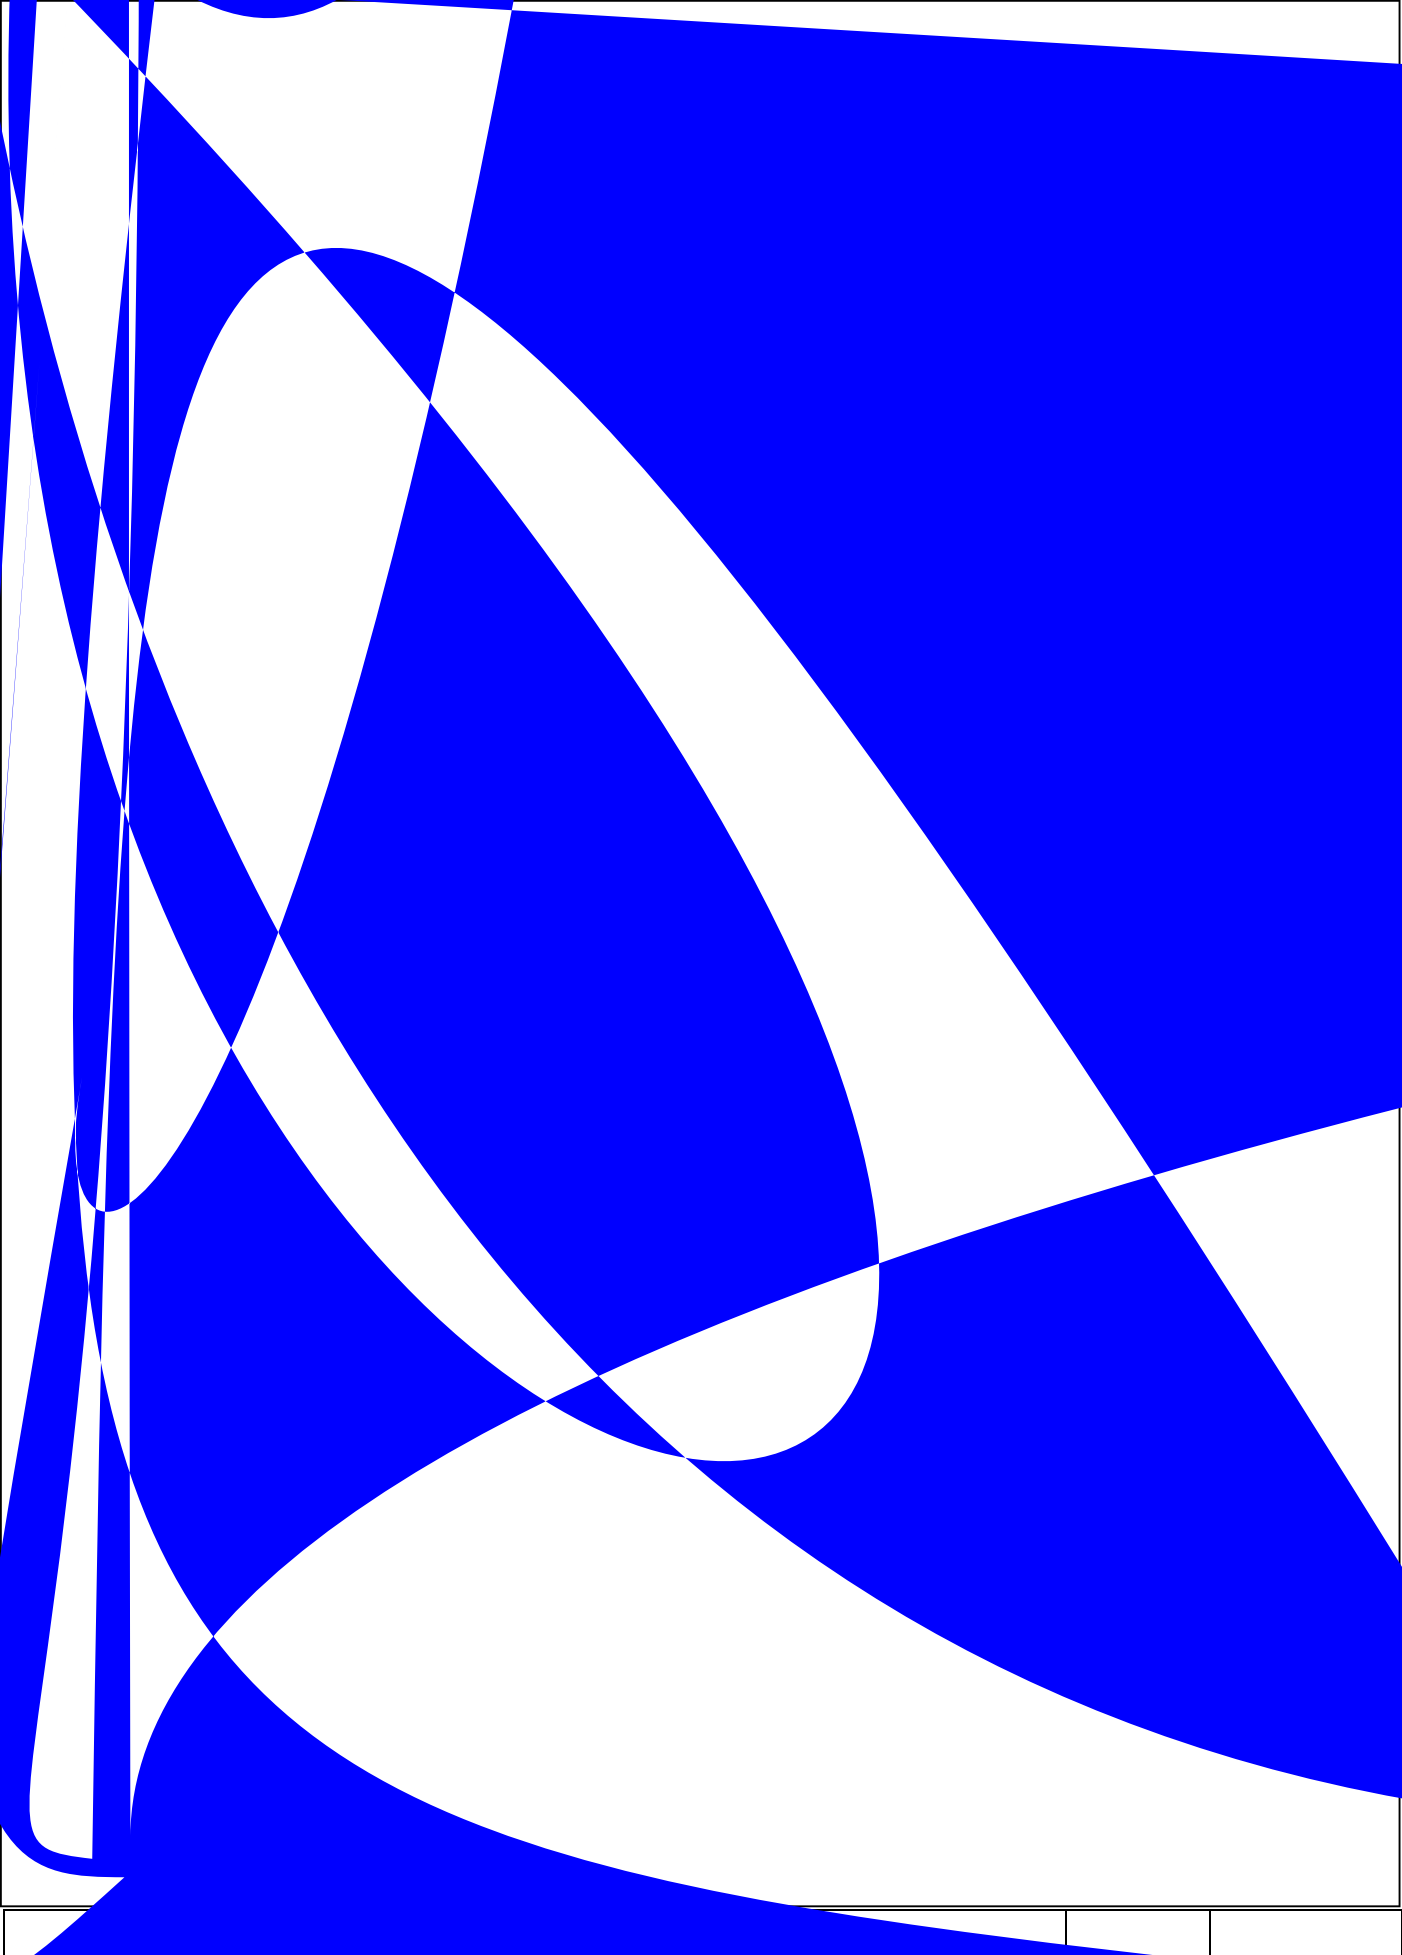

 <p>Relative Intensity</p>	
<p>Ambient Temperature(°C)</p>	

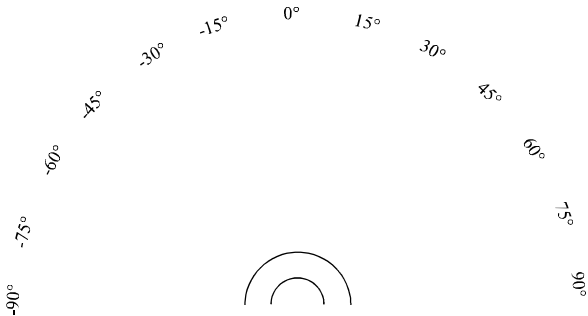--	--	--	--


### Chromaticity Coordinates (Ta=25°C, IF=20mA)

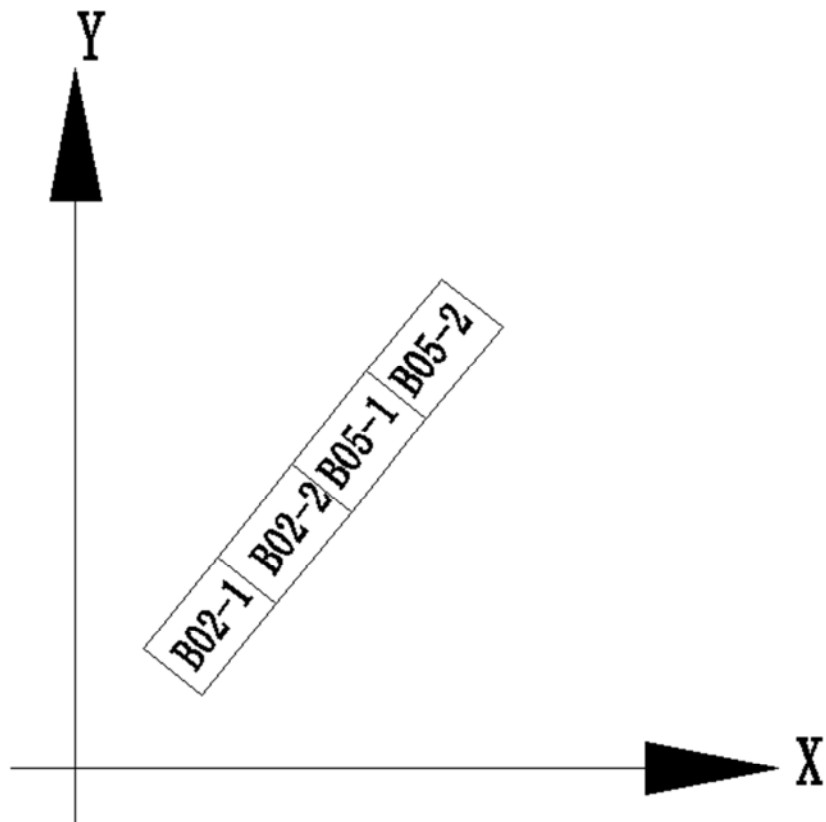

色区	X1	Y1	X2	Y2	X3	Y3	X4	Y4
B02-1	0.2716	0.2542	0.2672	0.2564	0.2713	0.2650	0.2759	0.2628
B02-2	0.2759	0.2628	0.2713	0.2650	0.2753	0.2732	0.2800	0.2710
B05-1	0.2800	0.2710	0.2753	0.2732	0.2792	0.2745	0.2840	0.2792
B05-2	0.2840	0.2792	0.2793	0.2815	0.2832	0.2898	0.2881	0.2874



### Carrier Tape Specifications (Loaded Quantity: 4000pcs/reel)

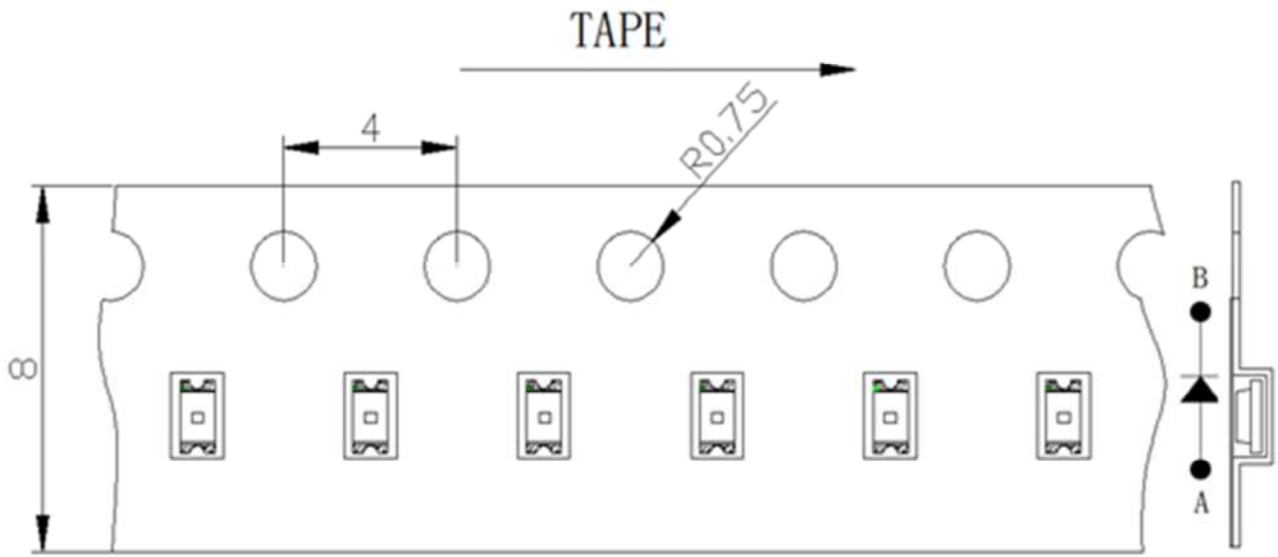

### Moisture Resistant Packaging

